


HOW TO ORDER CHECK-ALL STYLE HT

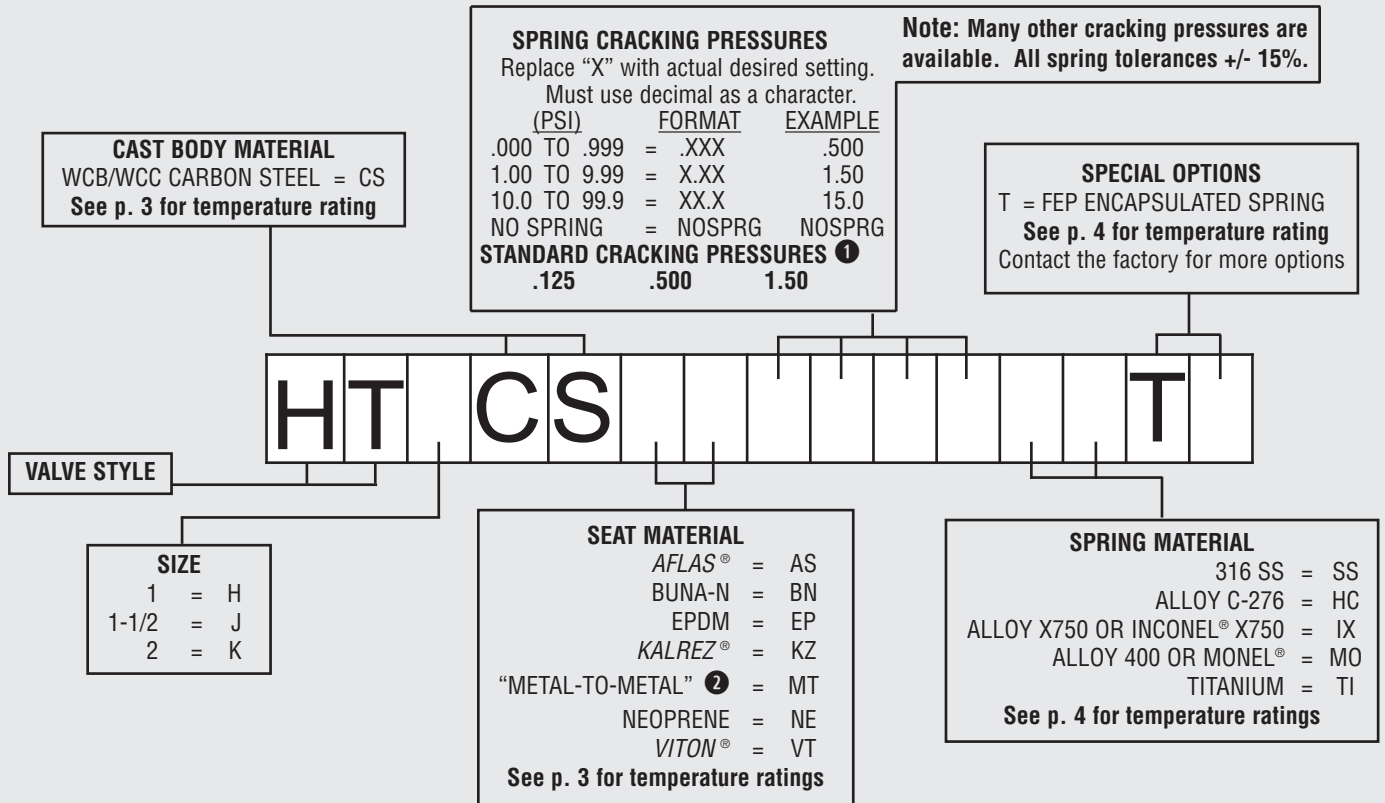

Listed above are the most common material selections. Please contact the factory for additional options.

① .500 PSI is the only standard cracking pressure for spring materials other than Stainless Steel. .125 PSI springs are not recommended for installations with flow vertical down.

② For PTFE lined valves, "MT" seats mean plastic to plastic. (No o-ring) See page 50 for allowable leakage rates.

www.checkall.com

sales@checkall.com

ISO 9001 CERTIFIED

MADE IN USA

2016

Trademarks Used

AFLAS® AGC Chemicals Americas, Inc.
MONEL® Special Metals Family of Companies

INCONEL® Special Metals Family of Companies
VITON® E.I. du Pont de Nemours and Company

KALREZ® E.I. du Pont de Nemours and Company