HOW TO ORDER
CHECK-ALL STYLE CB, TC (SIV)

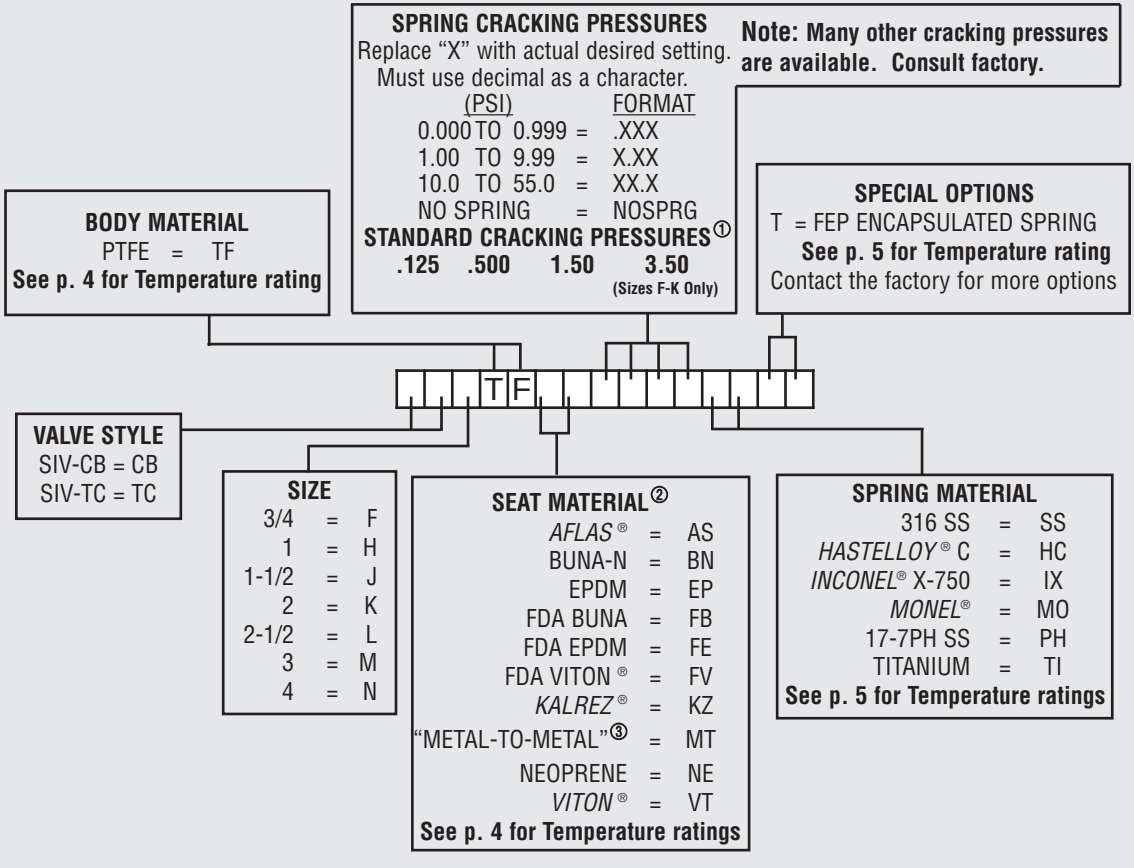

Listed above are the most common material selections. Please contact the factory for additional options.

① **.500 PSI is the only standard cracking pressure for spring materials other than Stainless Steel. Cracking pressure tolerance is +/- 15%.**

② **PTFE seats are not resilient. See page 49 for allowable leakage rates.**

③ **For plastic valves, seat is same as the body.**