


HOW TO ORDER

CHECK-ALL STYLE CB, TC

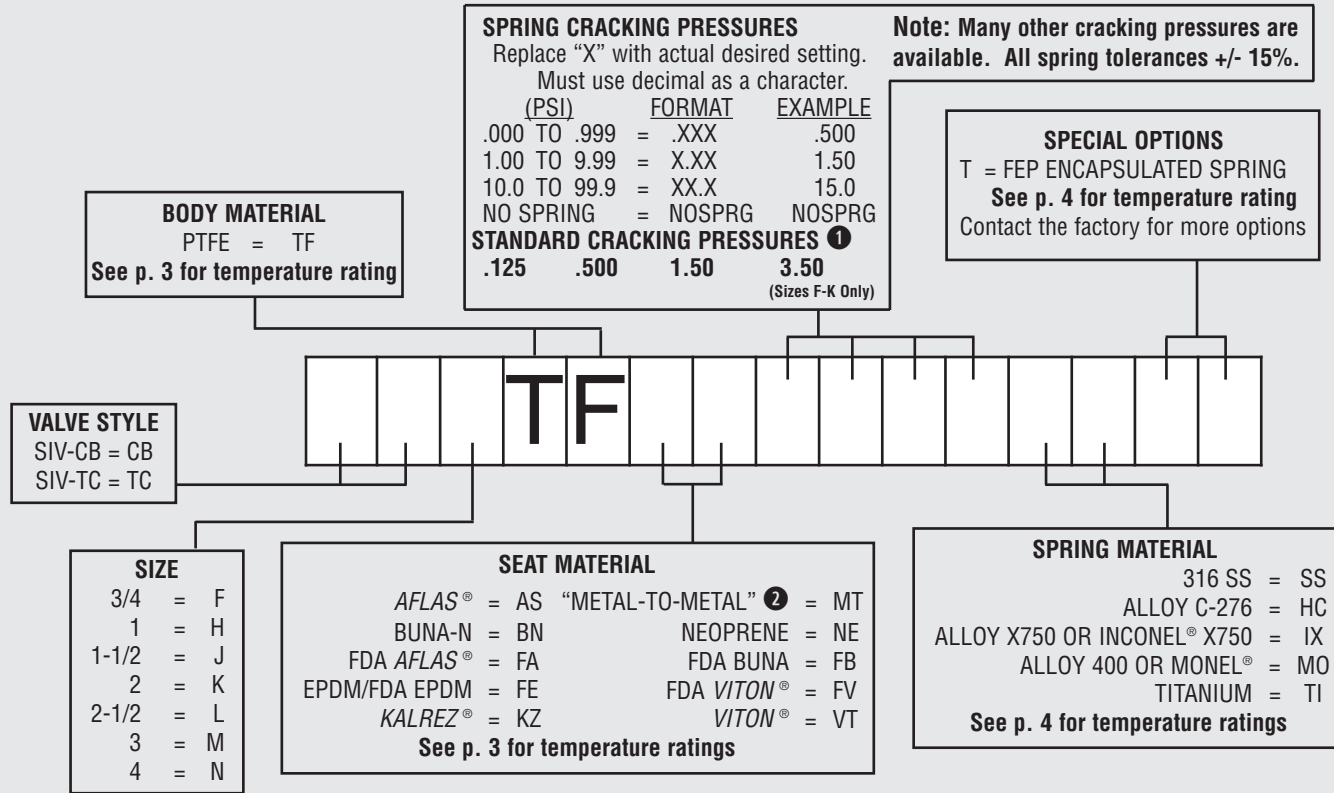

Listed above are the most common material selections. Please contact the factory for additional options.

- ① .500 PSI is the only standard cracking pressure for spring materials other than Stainless Steel. .125 PSI springs are not recommended for installations with flow vertical down.
- ② For PTFE valves, "MT" seats mean plastic to plastic. (No o-ring). See page 50 for allowable leakage rates.