HOW TO ORDER
CHECK-ALL STYLE U1 (UN-10)

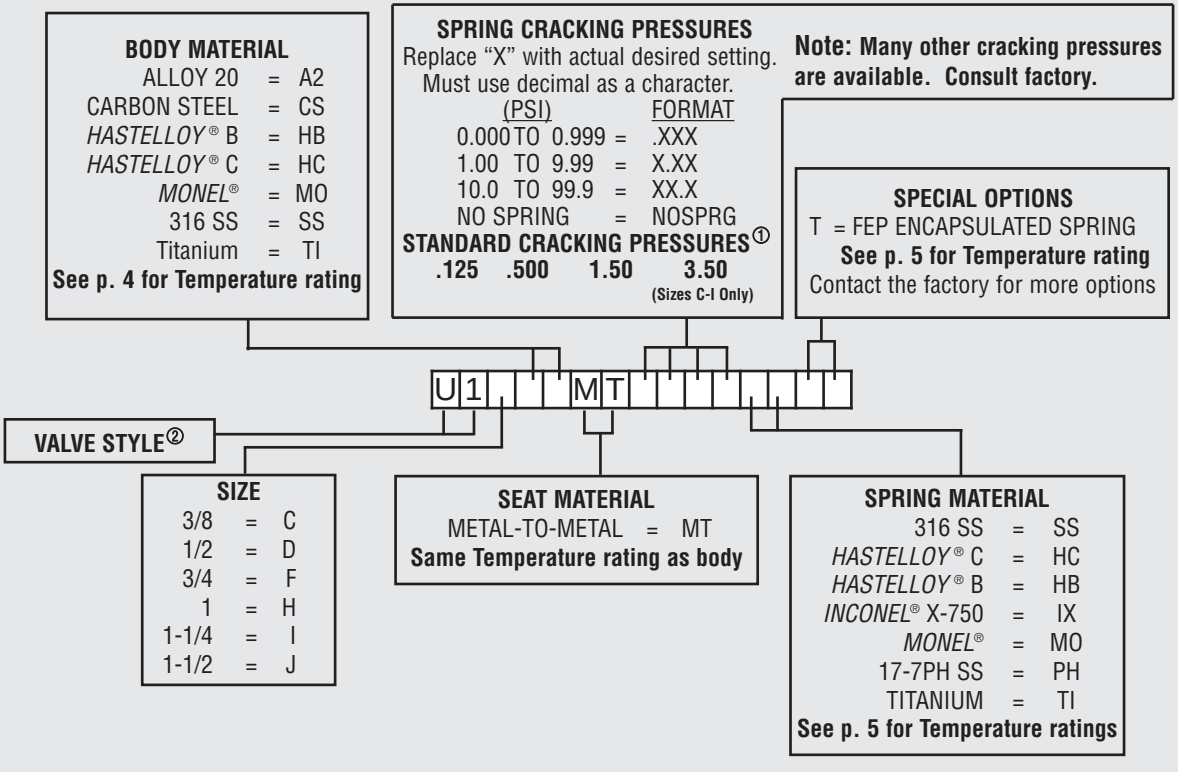

Listed above are the most common material selections. Please contact the factory for additional options.

①.500 PSI is the only standard cracking pressure for spring materials other than Stainless Steel. Cracking pressure tolerance is +/- 15%. .125 PSI springs are not recommended for installations with flow vertical down.

②Use "R1" for valves with ISO 7 "Rp" threads.