HOW TO ORDER
CHECK-ALL STYLE WV (WIV)

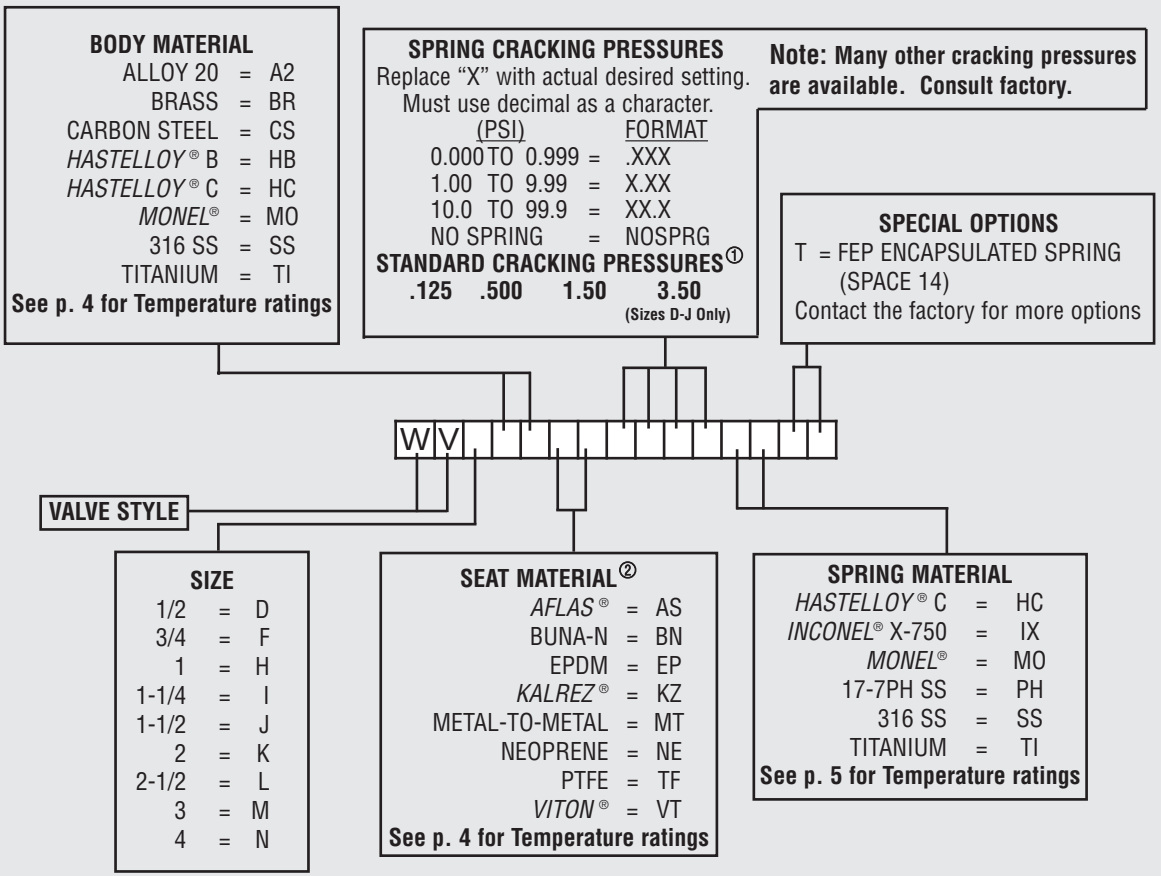

Listed above are the most common material selections. Please contact the factory for additional options.

①**Cracking pressure tolerance is +/- 15%.**

②**PTFE seats are not resilient. See page 49 for allowable leakage rates.**