



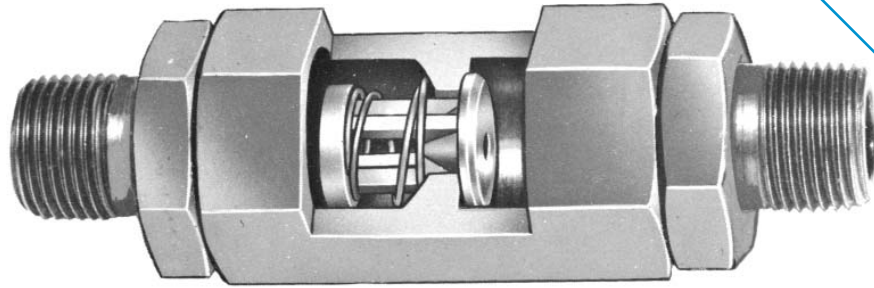


PED 97/23/EC  
COMPLIANT  
See Page 52 for Details

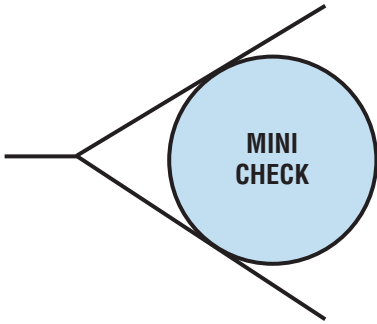

The **Mini-Check** is designed for minimum pressure drops. The three-piece construction permits many combinations of end fittings, which makes the valve adaptable for nearly every application. The Mini-Check is available with 1/8, 1/4 and 3/8 inch pipe threads, both male and female. It can also be supplied with a 1/4 or 3/8 inch **tubing end** on one side and with a **pipe thread end** on the other. **Combinations** of male and female threads are also available. Consult the factory for more information.

- M1 – Male pipe threads both ends.
- M2 – Female pipe threads both ends.
- M3 – Male pipe **inlet** – female pipe **outlet**.
- M4 – Female pipe **inlet** – male pipe **outlet**.
- M5 – Male pipe **inlet** – tubing **outlet**.
- M6 – Female pipe **inlet** – tubing **outlet**.
- M7 – Tubing **inlet** – male pipe **outlet**.
- M8 – Tubing **inlet** – female pipe **outlet**.

**NOTE:** When ordering styles M5 through M8 be sure to specify tubing size and whether **compression or 37° flare**.

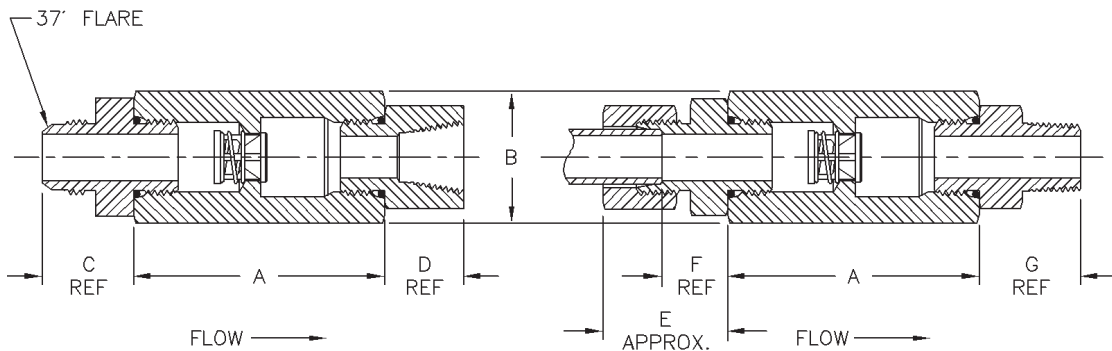

Nom. Pipe & Tube Size	Size Code	A	Hex Size B <sup>①</sup>	C	D	E	F	G	Orifice Diameter
1/8	A	2.16	7/8	N/A	0.71	N/A	N/A	0.71	0.348
1/4	B	2.16	7/8	0.89	0.84	1.23	0.57	0.95	0.348
3/8	C	2.48	1-1/8	0.94	0.91	1.32	0.59	1.00	0.464

<sup>①</sup>May be larger and/or round.


Body Material <sup>②</sup>	Non-Shock Pressure-Temperature Rating <sup>③</sup>
316 Stainless Steel (SS)	5000 PSIG @ 100°F
Carbon Steel (CS)	
Brass (BR)	3000 PSIG @ 100°F

<sup>②</sup>See page 51 for material grade information.

<sup>③</sup>Maximum Pressure 1500 PSI for o-ring seats.

### Mini Check

For Water at 72°F

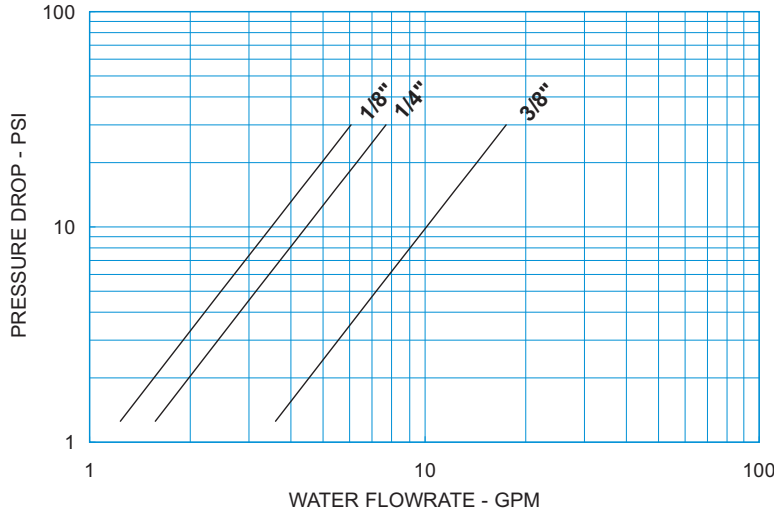


**Note:** All flow curves and Cv values presume the valves are fully open with 1/2 PSI cracking pressure springs. Consult the factory for more information.

STYLE MCV (M1-M8) C <sub>v</sub> VALUES & VALVE WEIGHTS		
C <sub>v</sub>	SIZE	ALL MATL
1.1	1/8	6.2 oz.
1.4	1/4	7.3 oz.
3.2	3/8	11.8 oz.

See page 46 for Flow Formulae

## HOW TO ORDER CHECK-ALL STYLE MCV (M1 - M8)

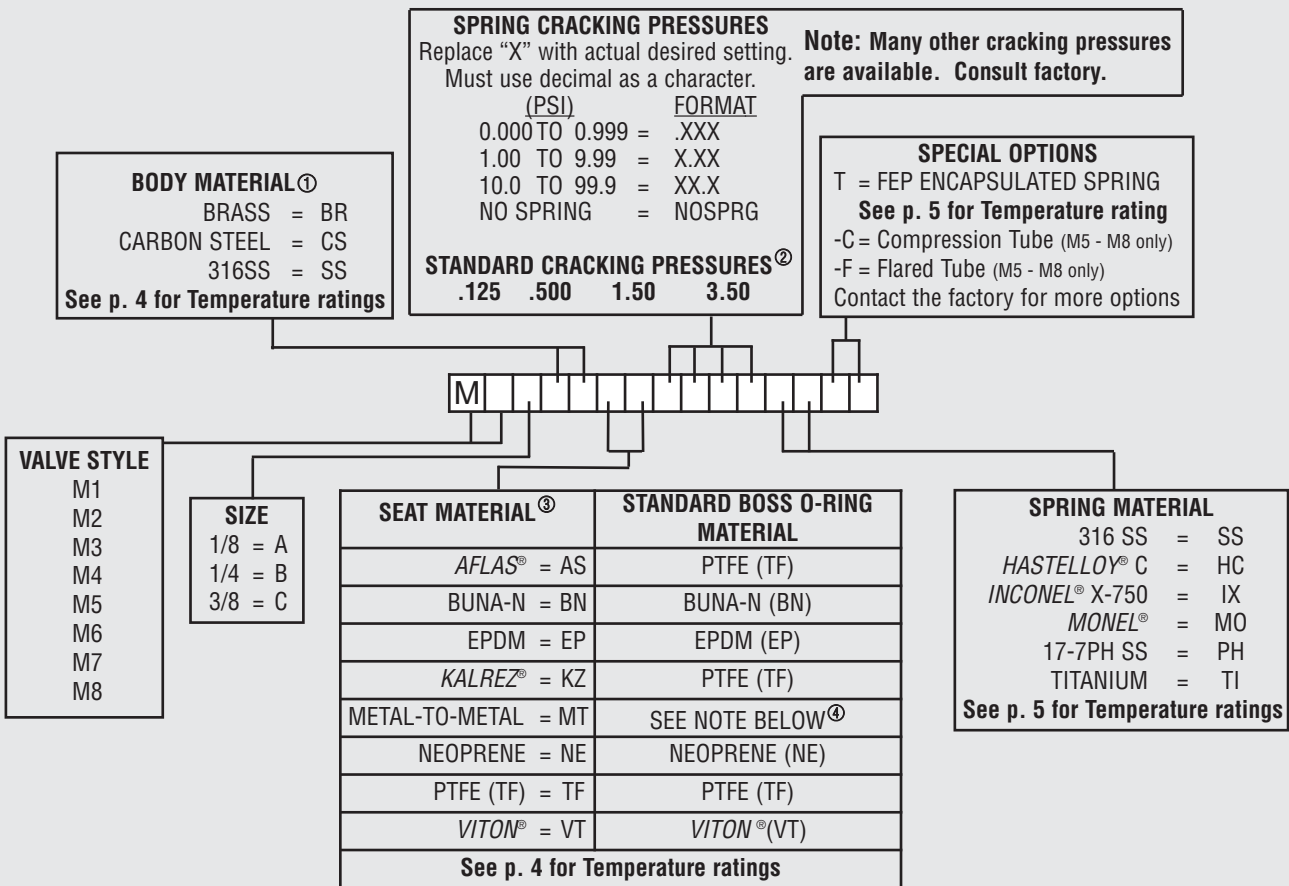

Listed above are the most common material selections. Please contact the factory for additional options.

- ① Brass valves have plated Carbon Steel tube fittings if applicable. Consult factory if other body or fitting materials are desired.
- ② .500 PSI is the only standard cracking pressure for spring materials other than Stainless Steel. Cracking pressure tolerance is +/- 15%. .125 PSI springs are not recommended for installations with flow vertical down.
- ③ Seat materials other than metal-to-metal have a maximum pressure rating of 1500 PSI. PTFE seats are not resilient. See page 47 for allowable leakage rates.
- ④ Brass and Carbon Steel valves have Buna-N boss o-rings, 316SS valves have Viton® boss o-rings.